



* All images in this datasheet are for illustrative purposes only.

Indoor LED LSAC

54" LED Video Wall Display



Easy Replacement
and Undemanding
Maintenance



Bezel-less
LED Display



Alpha 7 Intelligent
Processor



Optimum Cable-less
Design for Simple
Installation




LG webOS
Smart Platform

LSAC

Pixel Pitch	1.25 / 2.5 mm
Brightness	Peak. 1,000 nit / Max. 600 nit
Weight per Cabinet	23.5 / 22.5 kg
Serviceability	Front
IP Rating	IP20



Optimum Cable-less Design for Simple Installation

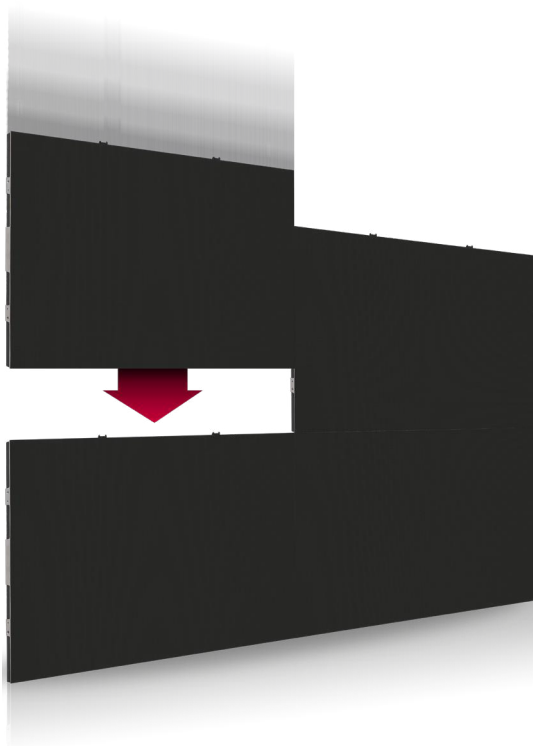


Cable-less Signal Transmission & Power Docking

The LSAC series is the innovative LED signage applying the cableless transmission technology with non connectors*. For up to UHD resolution with the 16:9 ratio, it does not require a cable connection between the cabinets to supply signal & power. Its block assembly design makes the LSAC series easier to be installed than before.

* Non Connectors: Connectors that use RF (Radio Frequency) to transmit and receive data between two devices.

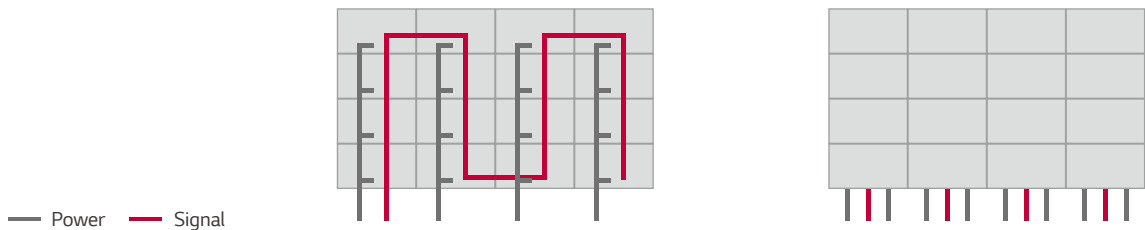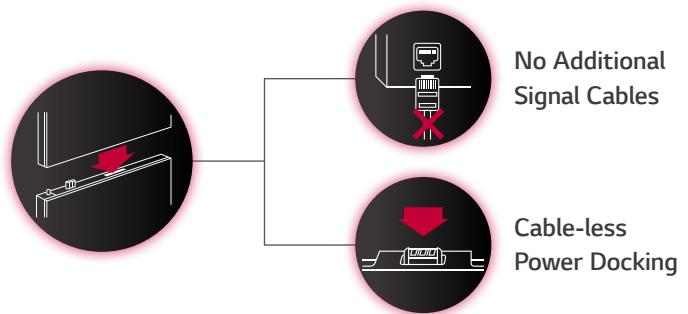

	LCD Video Wall 4x4	LSAC Series 4x4
The Number of Signal Cables	16 ea	4 ea
The Number of Power Cables	16 ea	8 ea
Lifetime (Half Brightness)	60,000 Hr	100,000 Hr

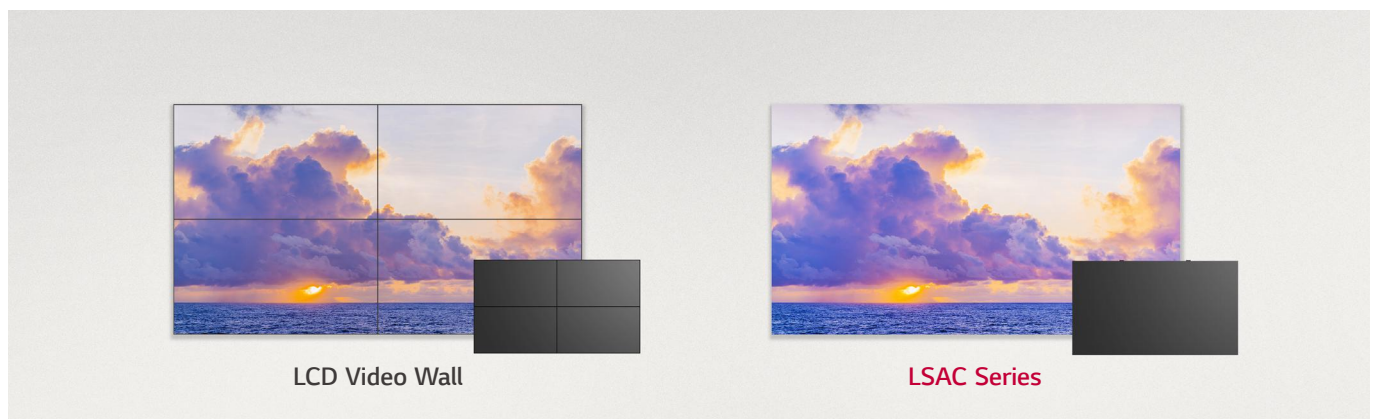


Easy Replacement and Undemanding Maintenance

Upgrade your existing 55-inch LCD video wall to the latest technology and LED display without having to secure additional space.

* The product can be installed using VESA wall-mount (600x400) and screws.

* The VESA wall-mount or any other wall-mounts are sold separately.

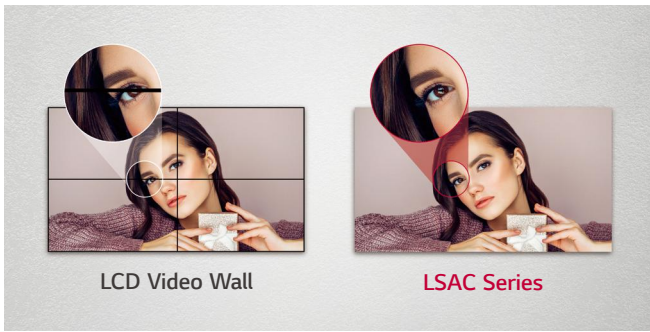

Bezel-less LED Display

Unlike the LCD video walls, LSAC series is truly bezel-free, so audiences can focus on visual content in its entirety without any bezel interference between displays.



Vivid Color Expression Powered by HDR

With HDR (HDR10, HDR10 Pro*) support, content becomes vivid with great visual impact. The wider color spectrum and greater contrast ratio allow viewers to fully enjoy lively content.

* HDR10 Pro is LG's own HDR solution for processing HDR signal by using enhanced dynamic tone mapping.

	Class A	Class B
USA	Non-residential	Residential
EU	Industrial	Residential, Commercial, Light Industrial

Emissions Increase

EMC Class B Certified

The LSAC series is certified as EMC Class B, which requires electronic equipment made for use in residential environments as well as commercial, industrial, or business environments. Therefore, it is suitable for up-close uses such as corporate meeting rooms, board rooms, etc.

LG Conventional LED Signage

20-25W per cabinet

VS


LSAC Series

10W per cabinet

No Input

Standby Mode

When there is no input signal for a period of time, the screen turns off and the main circuit parts inside the LED cabinet go to a standby mode. This saves additional power consumption and enables the product to be reactivated simply by using a remote control.

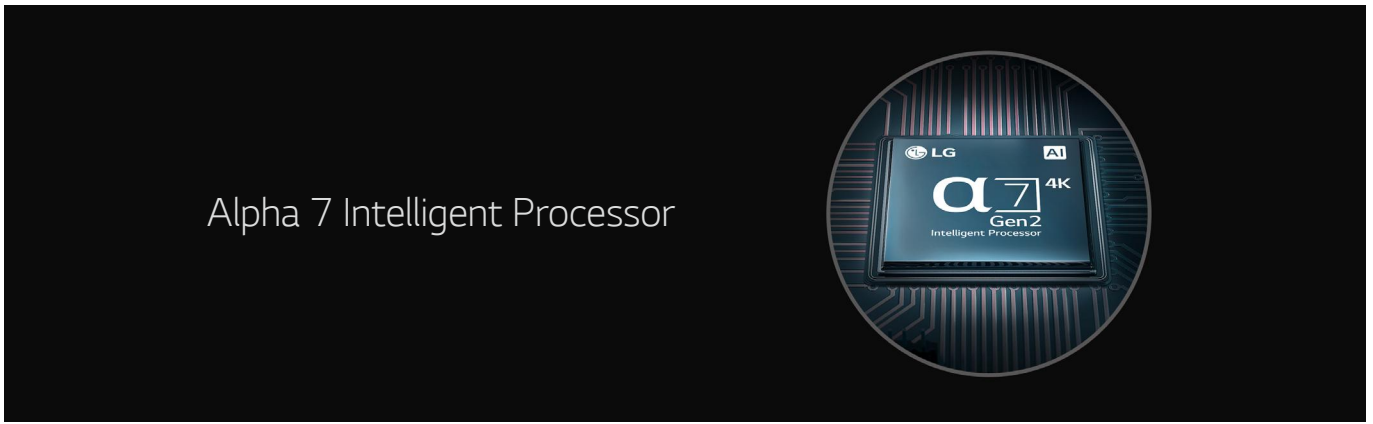

Optimized Image Quality with α7 Intelligent Processor

The "Alpha 7 Intelligent Processor" applied to the LSAC series recognizes and analyzes the original content, optimizing the clarity and sharpness of the content for itself.




Compatibility with LG Software Solutions

Powered by LG's high performance system controller, the LSAC series is compatible with LG software solutions including SuperSign CMS, LED Assistant, and ConnectedCare, which help customers operate their own business flawlessly.

- * 'LG ConnectedCare' and 'SuperSign CMS' need to be purchased separately.
- * The availability of the 'LG ConnectedCare' service differs by region, so please contact the LG sales representative in your region for more details.
- * The items that can be monitored by LG ConnectedCare : Main Board (Temp, Signal Status, FPGA Ver, Ethernet Connection Status), Receiving Card (Temp, LED Power)
- * Actual GUI may vary in different webOS versions.

CONNECTIVITY SYSTEM CONTROLLER

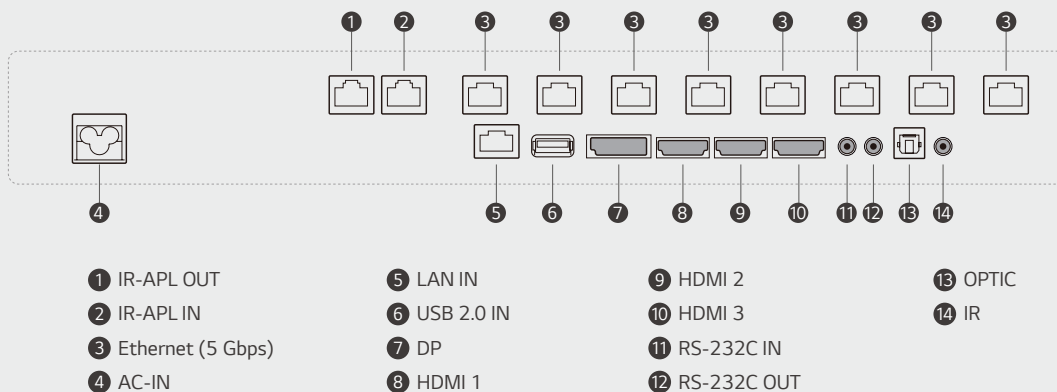

* Jack Panels may differ from the above image, so please contact LG sales team to verify before ordering.

SPECIFICATIONS

	LSAC012-MK/SK	LSAC025-MK/SK	
Physical Parameters	Pixel Configuration	3 in 1 SMD	3 in 1 SMD
	Pixel Pitch (mm)	1.25	2.5
	Module Resolution (W × H)	240 × 180	120 × 90
	Module Dimensions (W × H, mm)	300 × 225	300 × 225
	Weight per Module (kg)	0.63	0.43
	No. of Modules per Cabinet (W × H)	4 × 3	4 × 3
	Cabinet Resolution (W × H)	960 × 540	480 × 270
	Cabinet Dimensions (W × H × D, mm)	1,200 × 675 × 51	1,200 × 675 × 51
	Cabinet Surface Area (m ²)	0.81	0.81
	Weight per Cabinet (kg/unit)	23.5	22.5
	Weight per Square Meter (kg/m ²)	29.0	27.8
	Physical Pixel Density (pixels/m ²)	640,000	160,000
	Flatness of Cabinet (mm)	±0.5	±0.5
	Cabinet Material	Die Cast Aluminum	Die Cast Aluminum
	Service Access	Front	Front
Optical Specifications	Max Brightness (After Calibration, nit)	Peak, 1,000 / Max. 600	Peak, 1,000 / Max. 600
	Color Temperature (K)	3,200-9,300	3,200-9,300
	Visual Viewing Angle (H × V)	160 × 160	160 × 160
	Brightness Uniformity	95%	95%
	Color Uniformity	±0.015 Cx, Cy	±0.015 Cx, Cy
	Contrast Ratio	Peak, 9,000 : 1 / Typ. 5,000 : 1	Peak, 9,000 : 1 / Typ. 5,000 : 1
	Processing Depth (bit)	20 (HDR10, HDR10 Pro)	20 (HDR10, HDR10 Pro)
Electrical Specifications	Power Consumption (W/Cabinet, Max.)	320	290
	Power Consumption (W/Cabinet, Avg.)	210	190
	Power Consumption (W/m ² , Max.)	395	358
	Heat Dissipation (BTU/h/Cabinet, Max.)	1,092	990
	Heat Dissipation (BTU/h/Cabinet, Avg.)	717	648
	Heat Dissipation (BTU/h/m ² , Max.)	1,348	1,222
	Power Supply (V)	100 to 240	100 to 240
	Frame Rate (Hz)	50 / 60	50 / 60
	Refresh Rate (Hz)	3,840	3,840
Operation Specifications	LED Lifetime (Half Brightness)	100,000	100,000
	Operating Temperature (°C)	0 to +40	0 to +40
	Operating Humidity	10-80% RH	10-80% RH
	IP Rating Front / Rear	IP20	IP20
Controller	CSAC-012K	CSAC-025K	

* Specifications are subject to change without notice. Please make sure to check the product manual for details about product usage.



Download
LG C-Display+
Mobile App
Google Play Store

www.lg.com/global/business/information-display
www.youtube.com/c/LGCommercialDisplay
www.facebook.com/LGInformationDisplay
www.linkedin.com/company/LGInformationDisplay
twitter.com/LG_ID_HQ

LG may make changes to specifications and product descriptions without notice. Copyright © 2022 LG Electronics Inc. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp. The names of products and brands mentioned here may be the trademarks of their respective owners.